


Typ	a=4/1		Wymiary (mm)																			
	Wysokość podnoszenia	Udźwig	Prędkość podnoszenia /m/min/				L2	L3	L4	L5	L6	B*	B1	B2	B3	H1	H2	D	b	e	d	
			4	6	4/1	6/1																
			L1																			
KVAT20	H1	7.5	4000	1153	1153	1200	1200	324	565	25	132	765	1000	510	50	480	540	515	Ø160	50	1.5	10
	H2	11		1373	1373	1420	1420	434	785	-30	242	985										
	H3	14.5		1593	1593	1640	1640	544	1005	-85	352	1205										
KVAT30	H1	6.5	6300	1167	1196	1190	1190	324	565	30	76	831	1000	510	56	535	555	554	Ø200	50	1.5	12
	H2	9.5		1387	1416	1410	1410	434	785	-25	186	1051										
	H3	12.5		1607	1636	1630	1630	544	1005	-80	296	1271										
KVAT40	H1	6	10000	1206	1232	1287	1287	312	550	50	42	830	1200	572	71	535	780	595	Ø200	50	2	14
	H2	9		1452	1478	1533	1533	435	796	-10	165	1076										
	H3	12.5		1698	1724	1779	1779	558	1042	-70	288	1322										

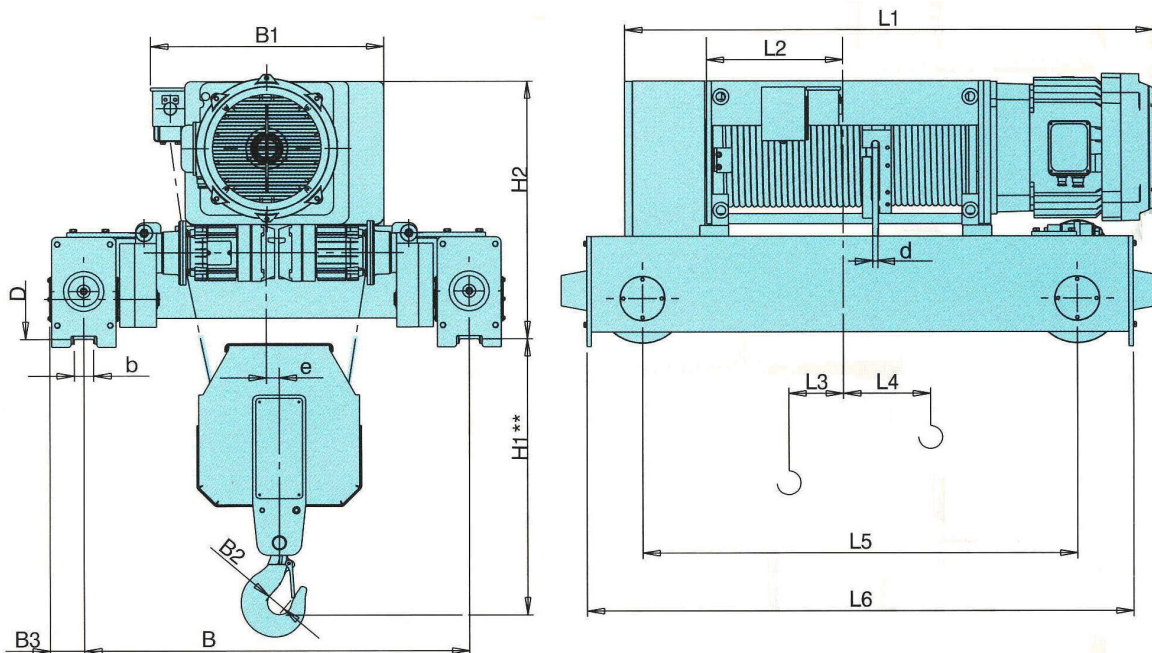

Typ	a=4/1		Wymiary (mm)																			
	Wysokość podnoszenia	Udźwig	Prędkość podnoszenia /m/min/				L2	L3	L4	L5	L6	B*	B1	B2	B3	H1	H2	D	b	e	d	
			2.5	4	2.5/0.6	4/0.6																
			L1																			
KVAT50	H1	6	20000	1436	1436	1436	1436	330	55	52	1152	1500	1200 1600	720	90	106	890	809	∅ 250	60	26	18
	H2	9		1636	1636	1636	1636	430	5	152	1352	1700										
	H3	12		1836	1836	1836	1836	530	-45	252	1552	1900										
	H4	18		2236	2236	2236	2236	730	-90	452	1952	2300										

Typ	a=4/1		Wymiary (mm)																			
	Wysokość podnoszenia	Udźwig	Prędkość podnoszenia /m/min/				L2	L3	L4	L5	L6	B*	B1	B2	S3	H1	H2	D	b	e	d	
			2.5	4	2.5/0.6	4/0.6																
			L1																			
KVAT60	H1	7	25000	1560	1560	1560	1560	394	91	40	1290	1718	760 0 2000	900	100	106	970	989	∅ 315	65	29	20
	H2	8.5		1660	1660	1660	1660	444	116	90	1390	1818										
	H3	11.5		1870	1870	1870	1870	549	169	195	1600	2028										
	H4	14.5		2080	2080	2080	2080	654	221	300	1810	2238										
	H5	17.5		2290	2290	2290	2290	759	273	355	2020	2448										
	H6	20.5		2500	2500	2500	2500	864	326	410	2230	2658										
	H7	23.5		2710	2710	2710	2710	969	378	465	2440	2868										
KVAT64	H1	5.5	32000	1560	1560	1560	1560	394	91	40	1290	1718	1600 2000	900	100	106	970	989	∅ 315	65	29	24
	H2	7		1660	1660	1660	1660	444	116	90	1390	1818										
	H3	9.5		1870	1870	1870	1870	549	169	195	1600	2028										
	H4	12		2080	2080	2080	2080	654	221	300	1810	2238										
	H5	14.5		2290	2290	2290	2290	759	273	355	2020	2448										
	H6	17		2500	2500	2500	2500	864	326	410	2230	2658										
	H7	20		2710	2710	2710	2710	969	378	465	2440	2868										